


**SC-505W
12 Memory
Stopwatch**

Operating Instructions

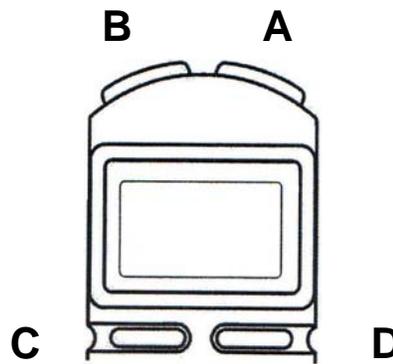

The **SC-505W** is a Multi-Mode Stopwatch featuring single event timing, interval (LAP) chronograph or accumulated (SPLIT) chronograph functions. You can time events in any mode up to 24 hours with 1/100 second resolution. The SC-505W automatically counts up to 199 lap or split readings and has memory recall of the last twelve (12) readings.

Before operating the SC-505W, the display should show all zeros. If the timer is not running (STOP appears), press “**B**” until all zeros appear. If the timer is running (RUN appears) press “**A**” to stop and press “**B**” until all zeros appear. Select the lap or split chronograph by pressing “**D**”. The mode selected will be indicated by LAP or SPLIT appearing in the top row.

The **Lap Chronograph** records and displays the interval of time from the previous reading(s). The **Split Chronograph** shows the accumulated time from the start of the event.

TIMING SINGLE EVENTS: You may time single events in either the lap or split mode. Press “**A**” to start timing (RUN appears). Press “**A**” again to stop timing (STOP appears). Press “**B**” to reset to all zeros.

MULTIPLE LAP OR SPLIT TIMING: Select LAP or SPLIT mode by pressing “**D**”. Press “**A**” to start timing. RUN appears. Press “**B**” to record lap or split times. The **Lap Counter** will increase by one (1) for each reading taken. Press “**A**” to stop timing and “**B**” to reset to all zeros.

LAP RELEASE: The time reading will remain frozen for 15 seconds or press “**D**” to release the chronograph to current running time.

MEMORY RECALL: You may review up to the previous twelve (12) time readings by pressing “**C**” (RECALL appears) while the timer is running or stopped (but not reset to all zeros).

OTHER FEATURES: (1) **ON DEMAND MEMORY:** You may continue to record lap or split times by pressing “**B**” even while you are using the RECALL function. (2) Record **CONTINUOUS SINGLE EVENTS** by pressing “**A**” to start timing and “**A**” again to stop timing. Repeat this sequence as many times as necessary. Reset to zeros by pressing “**B**” while the timer is stopped. (3) The **LAP COUNTER** automatically records up to 199 readings, after which the timer will stop.